



Technical Data Sheet

Luminate™ 7276F visible opaque compound

DESCRIPTION

Ready-to-mold thermoplastic

Blocks light from 200-860 nm


Allows transmittance above 990 nm

Appearance: black polycarbonate pellets

Target transmittance values

- 5% at 875 nm
- 50% at 910 nm
- 80% at 986 nm
- 85% at 1000 nm

Transmittance spectrum of Luminate 7276F (1.3 mm)

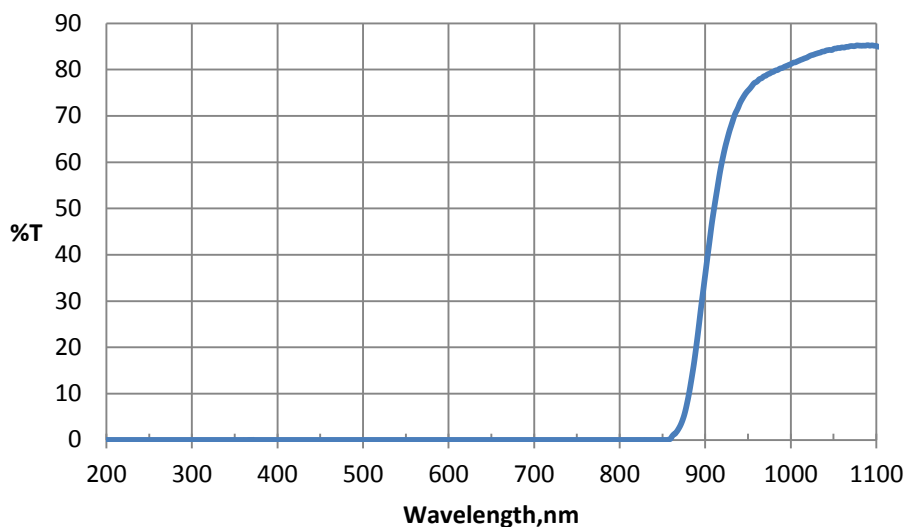

Although the information in this data sheet is presented in good faith and believed to be correct, Epolin makes no representations or warranties as to the completeness or accuracy of the information which is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will Epolin be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this data sheet or the products to which the information refers.